

#### **DENT-LTG-LS**



### **PoE Linear Suspended**

PoE Texas provides a variety of linear suspended lights specifically tested and supported by many PoE drivers including the DENT-LINC device. These fixtures have uplight and downlight adjustable in software via the PoE Network



## **Low Voltage Wiring**

This family of linear suspended lights comes in a variety of sizes, and CCT options and is designed to retrofit into existing applications. When connected to constant current driver such as the DENT-LINC-CC, you will achieve independently controllable uplight and downlight. These fixtures provide low voltage replacement to existing high voltage alternatives and seamlessly plug into any PoE controls platform.



#### **DENT-LTG-LS**

## **Denton Linear Suspended Fixtures**

#### **Features**

- Narrow 1.3" width
- 2', 4' 8' length options
- All models support lumen control on uplight and downlight independently
- Low voltage PoE CC driver interface
- CRI Ra > 80
- 150 deg uplight beam angle
- Power 10W/ft
- 110lm/W;
- 900-1200 lm/ft (depending on optics)
- 5 yr. warranty (longer options available)



### **Ordering Options** (DENT-LTG-LS-<length>-<cct>-<optics>-<mount>










### **Physical Sizes**




L 100.63"




### **DENT-LTG-LS**


# **Performance Examples**


Actual performance depends on software settings



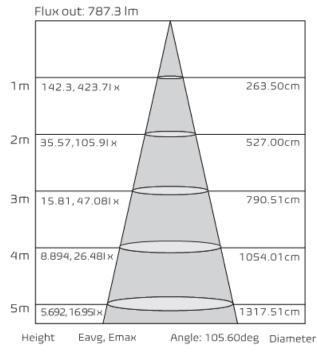

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.






Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



Photos DENT-LTG-LS


### **Optic Options**

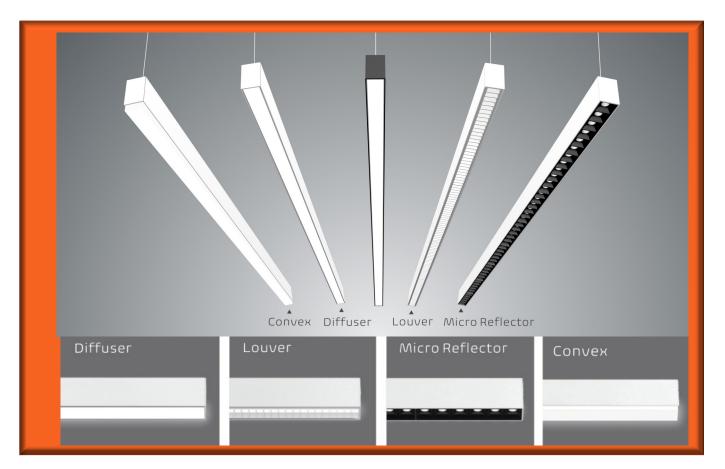

## **Applications**



**Surface Mount** 



**Pendant** 



Wall Mount