

LTG-HB-CCT

Dynamic CCT High Bay

PoE Texas developed the worlds first dynamically adjustable CCT highbay for use in commercial and hospitality applications. When controlled by the LINC PoE driver it enables any CCT between 3000K and 5000K to be selected at any time of day or with any button push




Dynamic CCT High Bay

Whether you are looking to support circadian rhythms, have a personal preference or work in hospitality where the look and feel of everything changes if you are at dim evening light (3000K) or bright cleaning mode (5000K). The even distribution of the light from the reflector ensures no glare issues. A protective tempered glass can be put over the bottom for environments such as gymnasiums for protection. The LTG-HB-CCT is a strong sturdy construction with high efficiency LEDs

DENT-LTG-DWN

Features

- ◇ Up to 80W power levels, 40W on Cool and Warm
- ◇ Beam Angle 60°
- ◇ >130 lumens/watt
- ◇ IP65 water proof rating
- ◇ Strong mounting clip
- ◇ 400 x 365 mm design
- ◇ 90+ CRI
- ◇ Warm and Cool channel independently controlled
- ◇ 3000K—5000K selectable via software
- ◇ Weight 2.5kg / 5.6 lbs
- ◇ Operating Temp 0°– 40° C
- ◇ Dimming & CCT adjustment in 0.4% increments

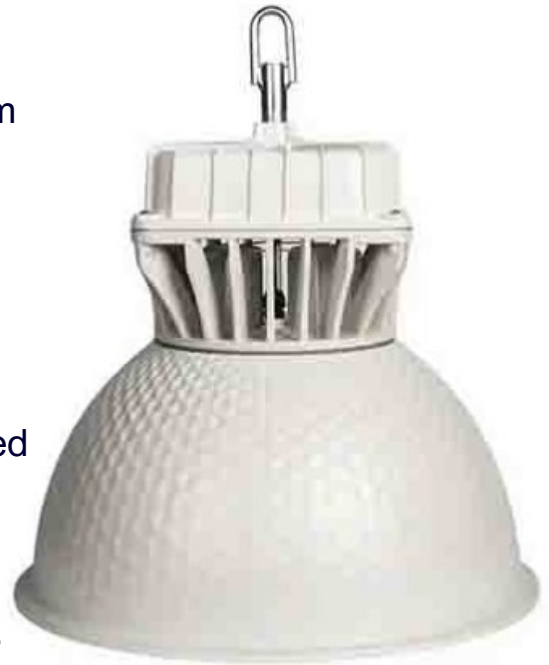

Application Photos



Application Photos

LTG-HB-CCT



Application Photos

LTG-HB-CCT



512-479-0317

Since 2011

poetexas.com

